
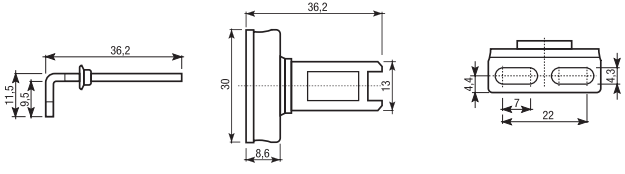



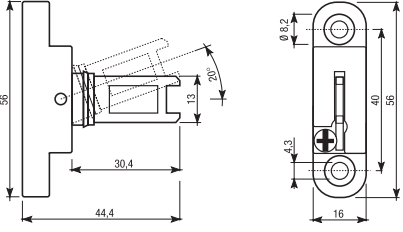

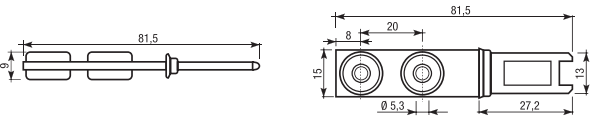

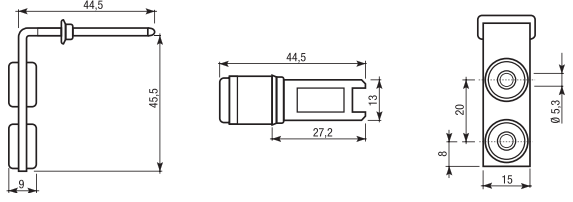








	Part no.	Description	Pack	Weight conf. (kg)	Dimensions
	Z5	Angle key mounting perpendicular to operating direction (key provided with the switch)	5	0,128	
	Z51	Straight key	5	0,128	
	Z52	Adjustable key	5	0,153	
	Z53	Straight key	5	0,128	
	Z54	Angle key mounting perpendicular to operating direction	5	0,128	
	M05	Clamp for Ø 5mm cable	5	0,140	
	R05	Wire rope thimble, shape A, for rope Ø5 mm - DIN 6899	5	0,050	
	T05	Wrought iron tension screw M6 x 60	5	0,320	
	O05	M8 eyelet with thread	5	0,155	
	F05	Ø 5mm Red safety cable	1	21,025	
	ELEM01	Slow action 1NO+1NC	5	0,485	
	ELEM04	Slow action 2NC	5	0,485	
	ELEM08	Slow action 2NC	5	0,485	

 standard article